


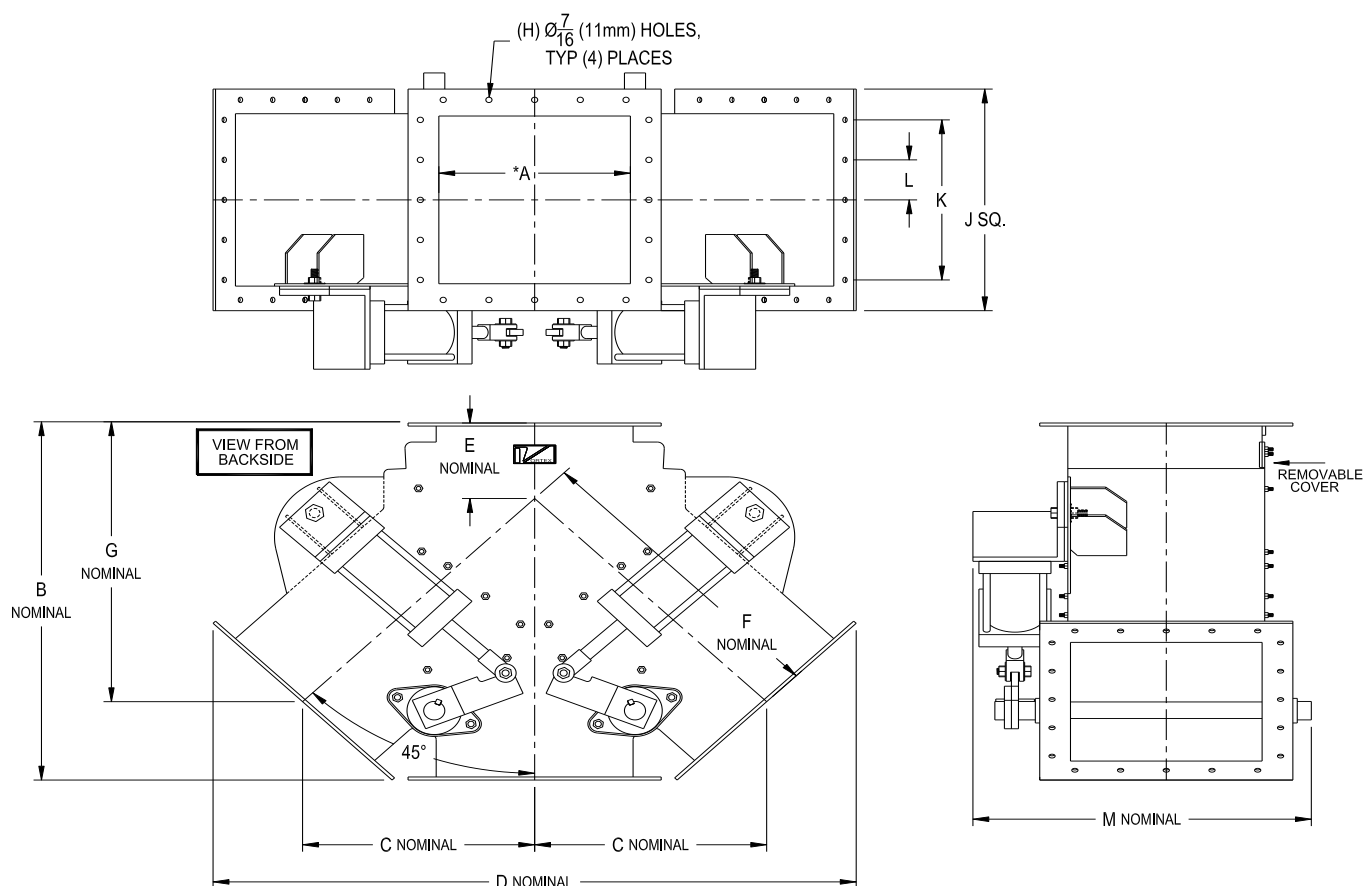

3-Way 45	A		B		C		D		E		F		G		H		J		K		L		M		WEIGHT	
MODEL in(mm)	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Lbs	Kg
Z04(100)-3XX-45	4	102	15 1/4	464	8	229	21 5/8	632	4 1/2	114	11 3/8	457	12 3/8	413	8	8	8	203	6 1/4	159	3 1/8	79	12	305	100	45
Z06(150)-3XX-45	6	152	18	521	9 3/4	267	26 5/8	752	4 3/4	121	13 3/4	533	14 1/2	457	8	8	10	254	7 1/4	184	4 1/8	105	13 3/4	349	150	68
Z08(200)-3XX-45	8	203	21	610	11 1/2	318	31 1/2	899	5 1/4	133	16 1/4	635	16 3/4	533	12	12	12	305	10 1/4	260	3 1/2	89	14 3/4	400	200	91
Z10(250)-3XX-45	10	254	23	648	13	356	35 7/8	1019	5	127	18 3/8	711	18	559	12	12	14	356	12 1/4	311	4 1/2	114	17 3/4	451	250	114
Z12(300)-3XX-45	12	305	26	724	14 3/4	406	40 7/8	1165	5 1/2	140	20 7/8	813	20 3/8	622	20	20	16	406	14 1/4	362	2 3/4	70	19 3/4	502	300	136
Z14(350)-3XX-45	14	356	29	800	16 1/2	457	45 3/4	1311	6 1/8	156	23 3/8	914	22 5/8	686	20	20	18	457	16 1/4	413	3 1/4	83	24	610	450	204
Z16(400)-3XX-45	16	406	32 1/2	889	18 1/2	508	51 1/8	1457	7	178	26 1/8	1016	25 3/8	762	20	20	20	508	18 1/4	464	3 3/4	95	26	660	525	238
Z18(450)-3XX-45	18	457	36	978	20 1/2	559	56 1/2	1600	7 3/4	197	29	1118	28 1/4	838	20	20	22	559	20 1/4	514	4 1/4	108	28	711	600	272

*Information subject to change without notice | Above information is Vortex standard dimensional information | Contact us if your application needs a non-standard valve | Available specifications and modifications available at www.vortexvalves.com